




Priza inteligenta
PNI SmartHome WP800



Manual de utilizare
RO

1.Priza inteligenta PNI SmartHome WP800 WiFi control prin internet, App Tuya Smart

Voltaj alimentare: 100-240V AC (50/60Hz)
Putere maxima : 3680 W
Curent maxim: 16A
Protocol Wireless: WiFi 2.4GHz
Standard Wireless acceptat: IEEE802.11 b/g/n
Tip conector priza: Schuko
Tip comanda: buton Pornit/Oprit/multifunctional
LED indicator : Da, multifunctional
Utilizare / temperatura: la interior / -26 ~ +55°C

1.2 Instructiuni de utilizare in mod manual:

1. Conectati priza inteligenta la o priza standard Schuko 230 V AC .
2. Pentru actionare manuala apasati butonul pozitionat lateral . Astfel veti putea porni/opri priza in mod manual.

1.2 Instructiuni de resetare / revenire la valorile de fabrica:

1. Apasati si tineti apasat butonul pentru 5 secunde.
2. Ledul indicator va clipi rapid pentru confirmare.

2. Descarcare / utilizare aplicatie smartphone

Utilizati telefonul mobil pentru descarca si instala aplicatia dedicata Tuya Smart sau Smart Life din Google Play(android) sau App Store(iOS). Sau scanati codul QR de mai jos:



Introduceti contul si parola creata in aplicatie pentru a va loga. Daca nu aveti cont, trebuie sa inregistrati un cont mai intai. Aplicatia va identifica locatia dumneavoastra automat. Puteti crea contul cu adresa personala de e-mail sau numarul de telefon.
Apasati "Next" pentru a primi pe e-mail (sau SMS) codul de verificare ce trebuie introdus. Introduceti apoi o parola pt. cont si apasati "Confirm" pentru a finaliza inregistrarea.

Register

Log in

China +86

Enter your mobile number

Next

China +86

24217788@tuya.com

Next



1.2 Instructiuni de adaugare prin mod AP (Acces point):

- Se utilizeaza doar daca nu reuseste configurarea rapida.
- Conectati telefonul la reseaua wireless cu acces la internet.
- Apasati si tineti apasat butonul pentru 20 secunde pana va clipi rar ledul dedicat, pentru a intra in modul AP.
- In aplicatia Tuya Smart apasati pe "+" si selectati Priza - "Socket(Wi-Fi)".

- Introduceti parola pentru reseaua WiFi si confirmati.
- Selectati modul de clipire rara (slow flashing)
- Conectati telefonul la reseaua WiFi creata de priza.
- Reveniti in aplicatie si continuati configurarea.
- Asteptati finalizarea procedurii / configurarea cu succes.

4. Control dispozitiv din aplicatie

Dupa adaugarea produsului cu succes, puteti controla din aplicatie priza dumneavoastra: Pornit/Oprit.

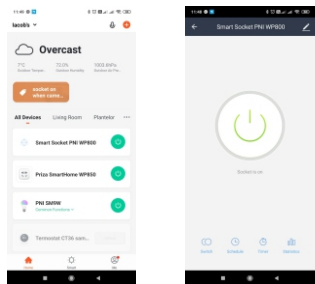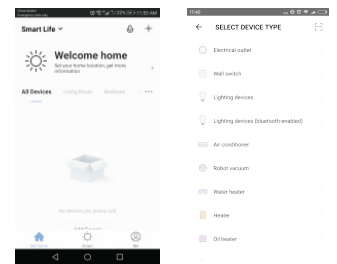

5. Setare Program/Temporizator

Puteti configura programe de functionare(schedule) sau temporizare (timer) pentru functiile Pornit/Oprit pentru priza PNI WP800.

6. Partajare dispozitiv cu alti utilizatori



1 Selectati "Share Device" in meniul avansat.
2 Apasati "Add Sharing"
3 Introduceti contul utilizatorului cu care doriti sa partajati dispozitivul (adresa de e-mail sau nr de telefon)
4 Utilizatorul va primi o informare / intrebare daca doreste sa accepte partajarea, dupa care dispozitivul va aparea si in contul acestui utilizator.

7. Resetare manuala dispozitiv

Apasati si tineti apasat butonul pentru 5 secunde pana va clipi rapid ledul dedicat, pentru resetare.

9. Conectare si control prin Amazon Alexa

Deschideti aplicatia "Amazon Alexa". Accesati meniul "Home" si selectati "Skills". Introduceti in bara de cautare "Tuya" sau "Smart Life" si apasati "Enable" pentru a adauga noul "Skill". Introduceti contul si parola aplicatiei Tuya (sau Smart Life). Mai departe apasati "Link now". Dupa ce legatura se face cu succes , inchideti fereastra si accesati din nou aplicatia Alexa.

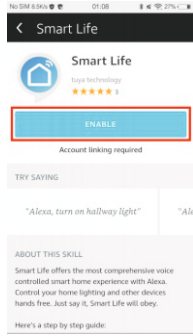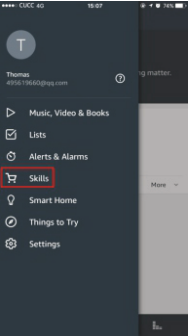

6. Partajare dispozitiv cu alti utilizatori



1 Selectati "Share Device" in meniul avansat.
2 Apasati "Add Sharing"
3 Introduceti contul utilizatorului cu care doriti sa partajati dispozitivul (adresa de e-mail sau nr de telefon)
4 Utilizatorul va primi o informare / intrebare daca doreste sa accepte partajarea, dupa care dispozitivul va aparea si in contul acestui utilizator.

7. Resetare manuala dispozitiv

Apasati si tineti apasat butonul pentru 5 secunde pana va clipi rapid ledul dedicat, pentru resetare.



10. Conectare si control prin Google Home

Deschideti aplicatia "Google Home" sau "Google Assistant". Accesati meniul "Home" si selectati "Home Control". Apasati "+" in coltul dreapta jos pentru a adauga "skill". Veti gasi "Tuya Smart" (sau "Smart Life") in lista "Add devices".

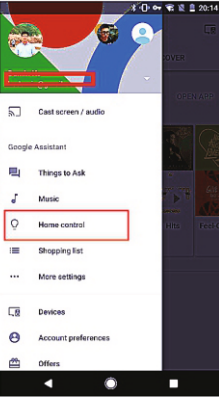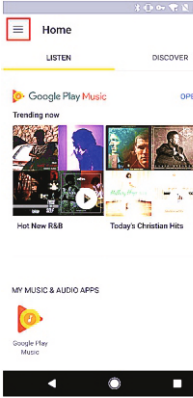

In continuare puteti utiliza Alexa pentru a controla vocal dispozitivele dumneavoastra smart. Exemplu: "Alexa, turn on/off bedroom socket"

Selectati codul de tara. Introduceti contul si parola de la "Tuya Smart" (sau "Smart Life"). Apasati mai departe "Link Now" pentru a continua. Dupa ce se executa legatura, puteti aloca dispozitivelor anumite camere. Ulterior veti gasi dispozitivele smart in lista "Home Control".

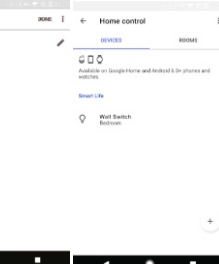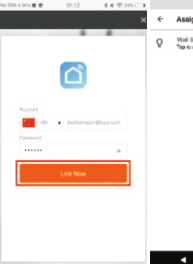


In continuare puteti utiliza Google Home pentru a controla vocal dispozitivele dumneavoastra smart. Exemplu: "Google , turn on/off bedroom socket"

Declaratie UE de conformitate simplificata

SC ONLINESHOP SRL declara ca Priza inteligenta PNI SmartHome WP800 este in conformitate cu Directiva EMC 2014/30/EU, Directiva RED 2014/53/UE si Directiva LVD 2014/35/EU. Textul integral al declaratiei UE de conformitate este disponibil la urmatoarea adresa de Internet: <https://www.mypni.eu/products/6947/download/certifications>



Smart Socket
PNI SmartHome WP800

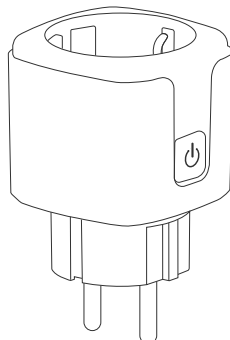

User Manual
EN

1.PNI SmartHome WP800 WiFi Smart Plug internet control, Tuya Smart App

Power supply voltage: 100-240V AC (50 / 60Hz)
Maximum power: 3680 W
Maximum current: 16A
Wireless Protocol: 2.4GHz WIFI
Wireless Standard Accepted: IEEE802.11 b / g / n
Plug connector type: Schuko
Order type: On / Off / Multifunction button
LED indicator: Yes, multifunctional
Use / temperature: indoors / -26 ~ + 55 ° C

1.2 Instructions for manual use:

1. Connect the smart socket to a standard Schuko socket 230 V AC.
2. For manual operation press the lateral button. This way you will be able to turn the power on / off manually.

1.2 Reset / return to factory settings:

1. Press and hold the button for 5 seconds.
2. The indicator light will flash quickly for confirmation.

2. Download / use smartphone application

Use your mobile phone to download and install dedicated app Tuya Smart or Smart Life from Google Play (Android) or App Store (iOS). Or scan the QR code below:



Enter your account and password in the application to log in. If you do not have an account, you must register an account first. The application will automatically identify your location. You can create the account with your personal email address or number phone.
Click "Next" to receive the e-mail (or SMS) code verification to be introduced. Then enter a password for account and click "Confirm" to complete the registration.

Register

Log in

China +86

Enter your mobile number

Next

China +86

24217788@tuya.com

Next



3.1 Instructions for adding via AP (Access point) mode:

- Used only if quick configuration fails.
- Connect your phone to WiFi network with internet access.
- Press and hold the button for 20 seconds until you dedicated LED blinks rarely to enter AP mode.
- In the Tuya Smart application, press "+" and select Socket - "Socket (Wi-Fi)".

- Enter the password for the WiFi network and confirm.
- Select the slow flashing mode
- Connect your phone to the WiFi network of the socket.
- Return to the application and continue the configuration.
- Wait for the completion of the procedure / successfully.

4. Device control from the application

After adding the product successfully, you can control it from your outlet application: On / Off.

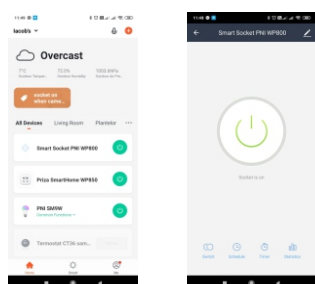
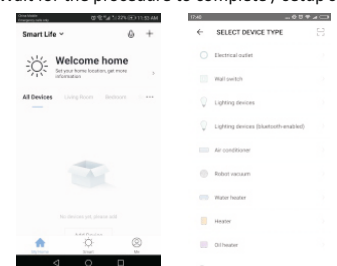


5. Program / Timer setting

You can configure schedules or timer for On / Off functions for PNI WP800 socket.

9. Connect and control through Amazon Alexa

Open the "Amazon Alexa" application. Access the "Home" menu and select "Skills". Enter in the search bar "Tuya" or "Smart Life" and click "Enable" to add the new "Skill". Enter your Tuya (or Smart Life) account and password. Then click on "Link now". After the connection is made with success, close window and access Alexa application again.

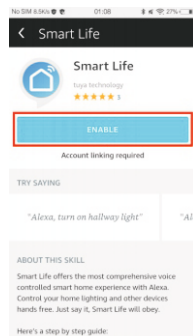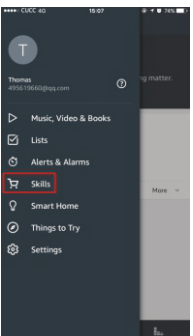

6. Sharing the device with other users



1 Select "Share Device" from the advanced menu.
2 Press "Add Sharing"
3 Enter the account of the user you want to share with the device (email address or phone number)
4 The user will receive an information / question if he wishes to accept sharing, after which the device will also appear in this user's account.

7. Reset the device manually

Press and hold the button for 5 seconds until you blink the dedicated LED for reset.



10. Connect and control through Google Home

Open "Google Home" or "Google Assistant" application. Go to the "Home" menu and select "Home Control". Press "+" in the bottom right corner to add "skill". You will find "Tuya Smart" (or "Smart Life") in the "Add devices" list.

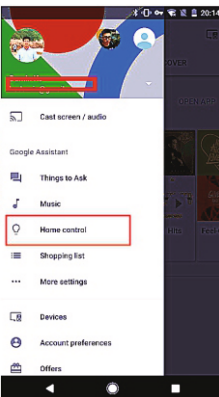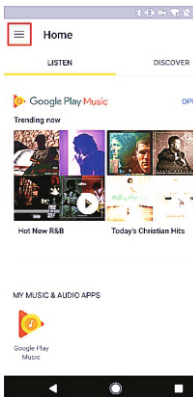

You can then use Alexa to control by voice your smart devices. Example: "Alexa, turn on / off bedroom socket"

Select the country code. Enter the account and password from "Tuya Smart" (or "Smart Life"). Click on "Link Now" to continue. After the connection is executed you can allocate devices to certain rooms. Later you will find the smart devices in the "Home Control" list.

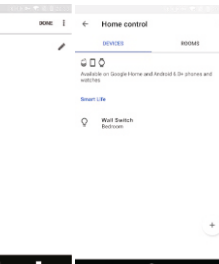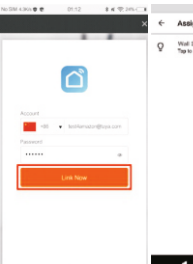

You can still use Google Home to voice control your smart devices. Example: "Google, turn on / off bedroom socket"

Simplified EU declaration of simplified compliance

SC ONLINESHOP SRL declares that PNI SmartHome smart outlet WP800 complies with EMC Directive 2014/30 / EU, RED Directive 2014/53 / EU and LVD Directive 2014/35 / EU. The full text of the EU declaration of conformity is available at the following internet address: <https://www.mypni.eu/products/6947/download/certifications>